



108LSMT

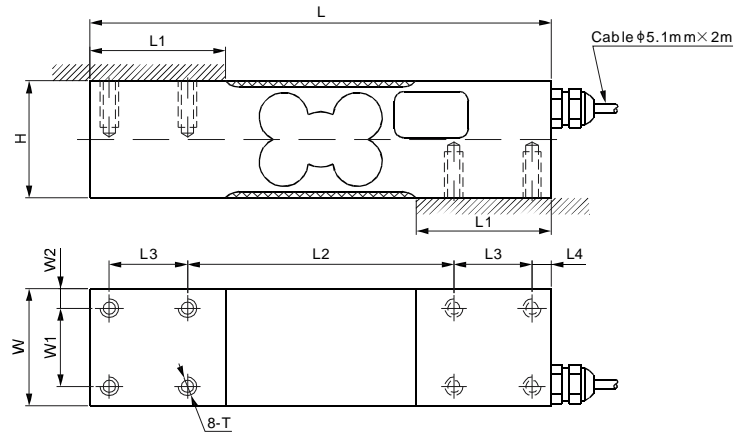

Stainless Steel

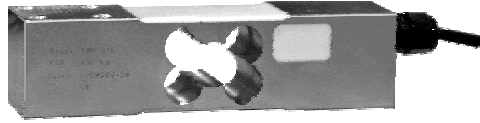


CE RoHS IP 66

DIMENSIONS

RATED CAPACITY	H	L	L1	L2	L3	L4	W	W1	W2	T
kg/mm										
30...300	38.0	150.0	44.0	86.6	25.4	6.3	38.0	25.4	6.3	M6 Depth 15
lb/inches (conversion of above dimensions)										
66...661	1.50	5.91	1.73	3.41	1.00	0.25	1.50	1.00	0.25	M6 Depth 0.59

SPECIFICATIONS

Rated Capacity	kg	30; 50; 100; 200; 300
Weight (G), approx.	kg/lb	1.4 / 3.1
Reference Max. Platform Size	mm	500×500
Full Scale Output	mV/V	2±10%
Zero Balance	mV/V	±0.06
Non-linearity	%	<±0.017
Repeatability	%	<±0.017
Hysteresis Error	%	<±0.017
Creep in 30 min.	%	<±0.023
Bridge Resistance	Ω	415±15
Rated Excitation	V(DC/AC)	10 (15V Maximum)
Insulation Resistance	GΩ	>1 [50 VDC]
Nominal Temperature Range	°C/°F	-10 to 40 / 14 to 104
Safe Overload	% of full scale	150
Breaking Overload	% of full scale	300
Seal Type		Environmentally-sealed, IP66

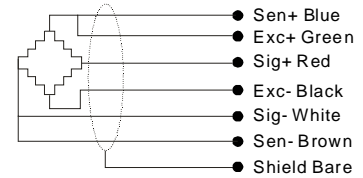

SINGLE POINTS

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Mettler-Toledo	SSP1241