



# 480 Legend Series

DIGITAL WEIGHT INDICATOR



**DIRECT UPGRADE**  
for the IQ plus® 355

**AS** **ASSOCIATED SCALE SERVICES**  
**07 3272 0077**

# 480 Legend Series

DIGITAL WEIGHT INDICATOR




## Classic Performance, Legendary Control

Advance to Rice Lake's Legend Series—classic Rice Lake quality and design with new ideas for tomorrow. As the flagship of Rice Lake's Legend Series, the 480 digital weight indicator has been perfected to provide the very best in performance and value.

With its stainless steel enclosure and advanced gasket system, the industrial-strength 480 is built for dirty, wet environments and demanding workplaces, inside or out. Advanced circuitry also withstands electrical noise, power disturbances and transient spikes that are common to industrial applications.

Rice Lake's 480 is the industry's first choice for readability. With its large, ultra-bright LED display, 0.8 inch digits and sharp contrast, the 480 provides superior display visibility. Its six-button tactile keypad allows for quick navigation and programming.

Connect the 480 to a printer, PC or remote display and make use of configurable print formats, time and date function, and local/remote capability. Whether it's used in heavy capacity or batching operations, the 480 powers as many as ten 350 ohm load cells in parallel. Engineered with Rice Lake's advanced digital filtering, the 480 Legend Series promises top speed without sacrificing weight stability.

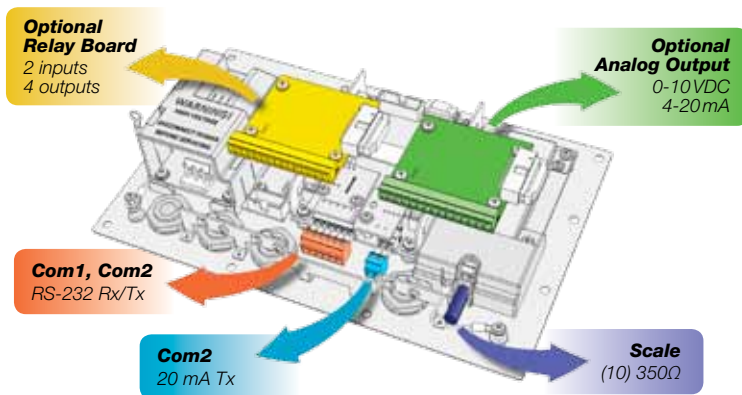

### Standard Features

- Large .8 inch LED display
- Nema 4X/IP66 stainless steel washdown
- Operator functions through Menu key for audit trail, tare, unit ID, accumulator, time and date, setpoints, serial communications, and print formats
- Time and date, battery backed
- 8 setpoints, free running or latched
- Password protection for user and configuration changes
- Two independent serial ports, RS-232 and 20mA
- Programmable ticket formats for gross, net, accumulator, and setpoints
- Local/remote operation
- Hardware or audit trail sealed
- Filter settings for light, medium and heavy noise
- Selectable conversion rate and display update rate

### Options

- Analog output, 0-10VDC, 0-20mA, selection for 20% offset
- Relay output, 2 digital inputs, 4 dry contact relays

### Specifications

<b>Power:</b>	70mA @ 115VAC, 35mA @ 230VAC
<b>Excitation Voltage:</b>	5VDC, 10 x 350Ω
<b>Input Range:</b>	7 mV/V
<b>Sensitivity:</b>	0.1 uV/graduation minimum 0.5 uV/graduation approved
<b>Resolution:</b>	Internal: 523,000 graduations Display: 100,000 displayed graduations
<b>Measurement Rate:</b>	Selectable 5, 10, 20 and 40Hz
<b>System Linearity:</b>	Within 0.01% of full scale
<b>Circuit Protection:</b>	18KV, 10V/meter
<b>Serial Output:</b>	Com 1: RS232 Full Duplex Com 2: RS232 Full Duplex or 20 mA Simplex
<b>Display:</b>	0.8 in (20.3 mm) LED 6 digit
<b>Status Annunciators:</b>	Gross, Net, Center of Zero, Standstill, lb, kg, Tare, Preset Tare
<b>Keyboard:</b>	Flat membrane panel, embossed keys, tactile feel
<b>Analog Output Option:</b>	16-bit resolution, voltage output 0-10VDC, current output 0-20mA
<b>Digital Inputs:</b>	Two inputs (requires relay output option). Primary keys, Pseudo functions, Batching functions.
<b>Relay Board Option:</b>	(2) opto-isolated inputs up to 24VDC (4) 30VDC, 2 Amp Dry Contact Relays
<b>Temperature Range:</b>	Legal for Trade: 14°F to 104°F/-10°C to +40°C
<b>Rating/Material:</b>	NEMA 4X/IP66
<b>Warranty:</b>	Two-year limited warranty
<b>Dimensions:</b>	9.5 in x 6 in x 2.75 in (241.3 mm x 152.4 mm x 69.9 mm)

### Approvals



CC Number 12-123  
Accuracy Class III/III<sub>max</sub>: 10,000



R76/2006-NL 1-12-48  
European Test Certificate TC8322  
European EC Type-Approval T5692  
Accuracy Class III/III<sub>max</sub>: 10,000

Measurement Canada Approved

AM-5892  
Accuracy Class III/III<sub>max</sub>: 10,000



Rice Lake Weighing System Distributor for Australia For sales of new equipment or spare parts please contact our support team at [sales@associatedscales.com.au](mailto:sales@associatedscales.com.au).



Associated Scale Service Pty Ltd  
Unit 4/47 Learoyd Rd  
Acacia Ridge  
Brisbane, Qld 4110 • Australia  
TEL: +61732720077  
FAX: +61732720363

[www.associatedscales.com.au](http://www.associatedscales.com.au)