



BAGGING WEIGHT FILLING SYSTEM

Simple to use, versatile

- **NET Bagging System**, the filling process is operating while the bag is being removed and readied for the next dump
- **GROSS Bagging** is where the filling and weighing is performed at the same time

**QUICK
OPERATION**

**EASILY TO
CHANGE BAG
WEIGHTS**

**STAND
ALONE OR
INTEGRATED
SYSTEMS**

**Designed for
customer
requirement**



**Single or Dual Product system (for 1 or 2 products)
Stainless Steel or painted GROSS OR NET WEIGHING**


**Designed and Manufactured in Australia by an
Australian Owned company**

Associated Scale Services Pty Ltd

Ph: +61 (0)7 3272 0077

Email: info@associatedscales.com.au

Web: www.associatedscales.com.au




GROSS WEIGH SYSTEM



Twin Load Cell Weighing

Pneumatic Bag Clamps

Adjustable Bag Stool

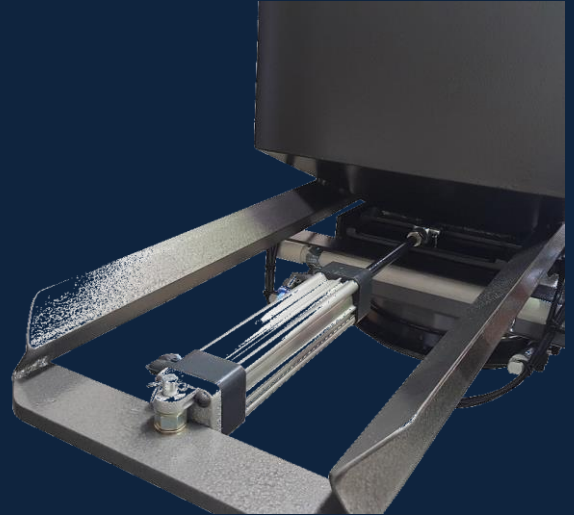

NET WEIGH SYSTEM

Weigh system separate from the bag clamps and product shoot. This is gated and allows for the filling and weighing even without a bag present

External Shoots is only to deliver the product to the bag

Pneumatically controlled bag clamps



GROSS WEIGHING Specifications and Features

Model	ASGB Net Bagging Weigh System
Capacity	Up to 30kg
Increments	0.02kg
Bag Sizes	Designed for a bag range of 10kg to 25kg (Bag Dependent)
Load Cell Capacities	2 x 150kg 108CA Load Cells
Pneumatics	Requires Clean Dry Air
Power	240VAC
Construction	Option 1: Painted Mild Steel Option 2: 304 Stainless Steel
Controls	Option 1: Rice Lake 880 Option 2: Rice Lake 920i Controllers are selected specifically around customers peripheral options as well as the requirements around reporting.
Peripheral Controls	System is designed around multiple speed devices to assist in accuracy. Controls for VSD (Variable Speed Drives) , Inching Gates are standard through specific outputs. Note the actual VSDs or Gates are not normally supplied but can be if required.
Bag Sizes	The system is designed around customers bag sizes and a range of bag sizes at the time of order.
Accessory (Included and optional)	Foot Switch for control Dust Extraction Vents Ethernet Communications for remote reporting Drive Types

NET WEIGHING Specifications and Features

Model	ASNB Net Bagging Weigh System
Capacity	Up to 30kg
Increments	0.02kg
Bag Sizes	Designed for a bag range of 10kg to 25kg (Bag Dependent)
Load Cell Capacities	2 x 150kg 108CA Load Cells
Pneumatics	Requires Clean Dry Air
Power	240VAC
Construction	Option 1: Painted Mild Steel Option 2: 304 Stainless Steel
Controls	Option 1: Rice Lake 880 Option 2: Rice Lake 920i Controllers are selected specifically around customers peripheral options as well as the requirements around reporting.
Peripheral Controls	System is designed around multiple speed devices to assist in accuracy. Controls for VSD (Variable Speed Drives) , Inching Gates are standard through specific outputs. Note the actual VSDs or Gates are not normally supplied but can be if required.
Bag Sizes	The system is designed around customers bag sizes and a range of bag sizes at the time of order.
Accessory (Included and optional)	Foot Switch for control Dust Extraction Vents Ethernet Communications for remote reporting Drive Types

12 month warranty

Designed and Manufactured in Australia by an Australian Owned company