

RL5416

RICE LAKE CANISTER LOAD CELL, IN STAINLESS STEEL, "RL5416" SERIES



Canister load cells for CE-M approved weighbridges, tanks, silos, etc. Manufactured in STAINLESS STEEL, IP69K protection degree, 4000 divisions.

CAPACITIES: 20t, 30t, 40t, 50t.

OIML R60. C4 precision class.

Stainless steel body. **IP69K** Protection Degree.

20 m armoured rat-proof cable with stainless steel armouring as standard

h= 150mm.

Working in cooperation with:

ASSOCIATED SCALE SERVICES PTY LTD
47 MORETON ST. - 4110 - HEATHWOOD - AUSTRALIA
Tel. +617 3277 0077 Fax. +617 3272 0363
sales@associatedscales.com.au

**The best solution
for advanced industrial
applications**

• TECHNICAL FEATURES

METROLOGICAL FEATURES

- Rated capacity: (F.S.): 20 t, 30 t, 40 t, 50 t
- Combined error: 0,022 %F.S.
- Creep error (after 30 min.): 0,014 %F.S.
- Temperature effect on zero: 0,02 %F.S./10°C
- Temperature effect on sensitivity: 0,01 %F.S./10°C
- Non-linearity error: 0.015%F.S.
- Non-repeatability error: 0.006%F.S.

OIML R60

- $V_{min} = E_{max}/14000$
- Accuracy class: C4
- Max. number of intervals: 4000e OIML

ELECTRONIC\MECHANICAL FEATURES

- Gas dischargers to protect against atmospheric discharges
- Power Supply: 5÷15 V (AC or CC)
- Rated output at F.S.: $2 \pm 0.05\%$ mV/V
- Input resistance: $800 \pm 3\Omega$
- Output resistance: $700 \pm 3\Omega$
- Insulation resistance: 5000M Ω
- Operating temperature: -35 ~ +70 °C
- Compensated temperature for homologation: -10 ~ +40 °C
- Storage temperature limits: -40° ~ +80°
- Normal service: 120% F.S.
- Maximum load / Safe load: 150% F.S.
- Ultimate overload: 300% F.S.
- IP69K protection degree
- Stainless steel body
- 6-core cable with stainless steel shield, length 20 m, diameter 6mm
- Nickel plated steel cable gland with protective spring
- Self-centring spherical bases
- Equipped with anti-rotation system, to be combined with 173793 cups for proper operation


- CONNECTION

Cable Color Code	
RED	INPUT +
BLACK	INPUT -
GREEN	OUTPUT +
WHITE	OUTPUT -
YELLOW	SENSE +
BLUE	SENSE -
METAL	Shield

- INSTALLATION KIT

- The 173793 kit allows a correct installation of the RL5416 load cells below the weighbridge plate.
- The kit consists of an upper cup and a lower cup with anti-rotation system. All components are made from stainless steel. Both cups are designed for optimal operation in conjunction with the cell's self-centring spherical bases, allowing their proper oscillation and return to position.

DETAIL 1

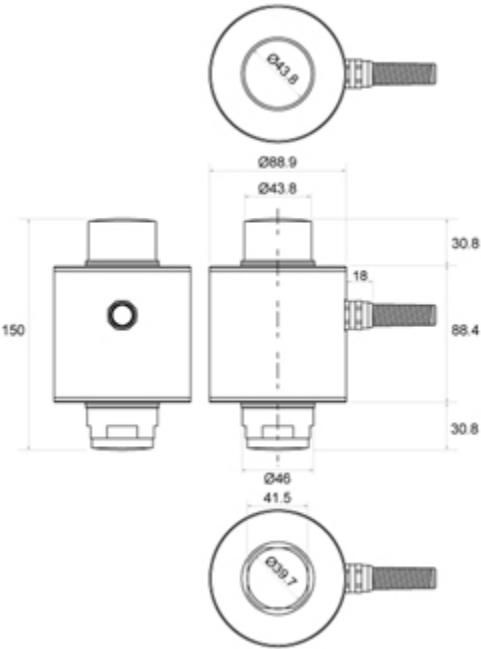

VERSIONS

Available versions

Code		Max (kg)
RL5416-20T		20 000
RL5416-30T		30 000
RL5416-40T		40 000
RL5416-50T		50 000



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

ASSOCIATED SCALE SERVICES PTY LTD

47 MORETON ST. - 4110 - HEATHWOOD - AUSTRALIA

Tel. +617 3277 0077 Fax. +617 3272 0363

sales@associatedscales.com.au

SALES AND TECHNICAL ASSISTANCE SERVICE