
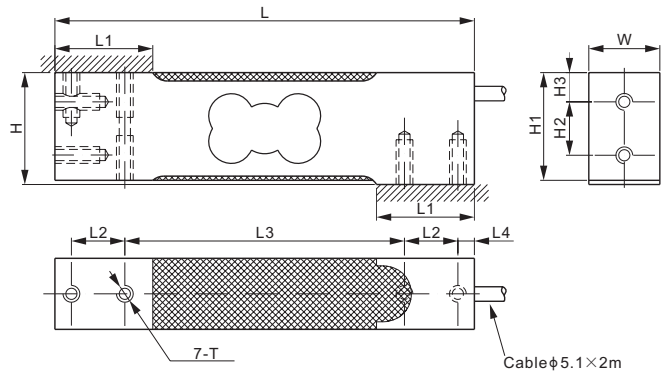


108TA; 108TAUN

ANYLOAD

Aluminum

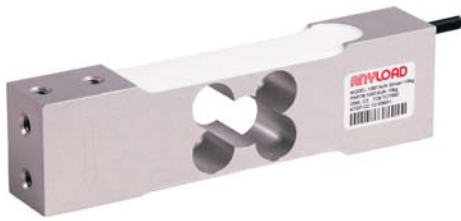

DIMENSIONS

RATED CAPACITY	H	H1	H2	H3	L	L1	L2	L3	L4	W	T
108TA, 108TA-A1, 108TA-A2:											
kg/mm											
3-200	40.0	38.5	19.1	10.5	150.0	35.0	19.1	100.0	5.9	25.4	M6 Depth 16
lb/inches (conversion of above dimensions)											
6.61-440.92	1.57	1.52	0.75	0.41	5.91	1.38	0.75	3.94	0.23	1.00	M6 Depth 0.6
108TAUN, 108TAUN-A1, 108TAUN-A2:											
kg/mm											
3-200	40.0	38.5	19.1	10.5	150.0	35.0	19.1	100.0	5.9	25.4	1/4-20UNC-2B Depth 16
lb/inches (conversion of above dimensions)											
6.61-440.92	1.57	1.52	0.75	0.41	5.91	1.38	0.75	3.94	0.23	1.00	1/4-20UNC-2B Depth 0.6

SPECIFICATIONS

Maximum Capacity (Emax)	kg	3-200	5-200	5-200
Accuracy class according to NTEP Class III S		1:3000	1:4000	1:5000
Maximum number or verification interval (nmax)		3000	4000	5000
Y		12300		
Temperature effect on zero balance	%*Cn/K	± 0.00114		
Temperature effect on sensitivity	%*Cn/K	± 0.0012	± 0.000875	± 0.0007
Non-linearity	%*Cn	± 0.017	± 0.010	± 0.0075
Hysteresis Error	%*Cn	± 0.017	± 0.012	± 0.010
Creep error (30min)/DR	%*Cn	± 0.017	± 0.012	± 0.010
Full Scale Output (Cn)	mV/V	2 ± 10%		
Zero Balance	mV/V	± 0.02		
Recommended voltage	V	10 (15 Maximum)		
Input Resistance	Ω	415 ± 15		
Output Resistance	Ω	350 ± 3		
insulation resistance [50V DC]	GΩ	>2		
Safe overload [Elim]	%*Emax	150		
Breaking overload	%*Emax	300		
Safe side load	%*Emax	100		
Nominal temperature range	°C / °F	-10 to 40 / 14 to 104		
Element Material		Aluminum, Clear Anodized		
Seal type / IP rating		Environmentally Sealed / IP66		
Cable color code		Exc+ Red Exc- Black Sig+ Green Sig- White		

SINGLE POINTS

PART NUMBER*

Metric thread, 1:3000 accuracy

Rated Capacity	Part No.	Weight Approx. (kg)
3kg.....	108TA-3kg.....	0.4
5kg.....	108TA-5kg.....	0.4
7kg.....	108TA-7kg.....	0.4
10kg.....	108TA-10kg.....	0.4
15kg.....	108TA-15kg.....	0.4
20kg.....	108TA-20kg.....	0.4
30kg.....	108TA-30kg.....	0.4
50kg.....	108TA-50kg.....	0.4
75kg.....	108TA-75kg.....	0.4
100kg.....	108TA-100kg.....	0.4
150kg.....	108TA-150kg.....	0.4
200kg.....	108TA-200kg.....	0.4

Metric thread, 1:4000 accuracy

Rated Capacity	Part No.	Weight Approx. (kg)
5kg.....	108TA-5kg-A1.....	0.4
7kg.....	108TA-7kg-A1.....	0.4
10kg.....	108TA-10kg-A1.....	0.4
15kg.....	108TA-15kg-A1.....	0.4
20kg.....	108TA-20kg-A1.....	0.4
30kg.....	108TA-30kg-A1.....	0.4
50kg.....	108TA-50kg-A1.....	0.4
75kg.....	108TA-75kg-A1.....	0.4
100kg.....	108TA-100kg-A1.....	0.4
150kg.....	108TA-150kg-A1.....	0.4
200kg.....	108TA-200kg-A1.....	0.4

Metric thread, 1:5000 accuracy

Rated Capacity	Part No.	Weight Approx. (kg)
5kg.....	108TA-5kg-A2.....	0.4
7kg.....	108TA-7kg-A2.....	0.4
10kg.....	108TA-10kg-A2.....	0.4
15kg.....	108TA-15kg-A2.....	0.4
20kg.....	108TA-20kg-A2.....	0.4
30kg.....	108TA-30kg-A2.....	0.4
50kg.....	108TA-50kg-A2.....	0.4
75kg.....	108TA-75kg-A2.....	0.4
100kg.....	108TA-100kg-A2.....	0.4
150kg.....	108TA-150kg-A2.....	0.4
200kg.....	108TA-200kg-A2.....	0.4

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.

INTERCHANGEABLE PRODUCTS

Brand	Model
108TA	
Flintec.....	PC42 (20-150kg)*
Vishay Revere Transducers.....	642C
Vishay Tedeo-Huntleigh.....	1042(metric threads)

* Flintec PC42 has a M8 mounting hole



NTEP 1:5 000 Class III, Single Cell



3kg: OIML C3



5kg-30kg: OIML MAA C7.5, Y=20 000;
50kg-200kg: OIML MAA C6, Y=29 000

For further definition of P/N's & specifications per NTEP/OIML classes, please contact us.

PART NUMBER*

Imperial thread, 1:3000 accuracy

Rated Capacity	Part No.	Weight Approx. (kg)
3kg.....	108TAUN-3kg.....	0.4
5kg.....	108TAUN-5kg.....	0.4
7kg.....	108TAUN-7kg.....	0.4
10kg.....	108TAUN-10kg.....	0.4
15kg.....	108TAUN-15kg.....	0.4
20kg.....	108TAUN-20kg.....	0.4
30kg.....	108TAUN-30kg.....	0.4
50kg.....	108TAUN-50kg.....	0.4
75kg.....	108TAUN-75kg.....	0.4
100kg.....	108TAUN-100kg.....	0.4
150kg.....	108TAUN-150kg.....	0.4
200kg.....	108TAUN-200kg.....	0.4

Imperial thread, 1:4000 accuracy

Rated Capacity	Part No.	Weight Approx. (kg)
5kg.....	108TAUN-5kg-A1.....	0.4
7kg.....	108TAUN-7kg-A1.....	0.4
10kg.....	108TAUN-10kg-A1.....	0.4
15kg.....	108TAUN-15kg-A1.....	0.4
20kg.....	108TAUN-20kg-A1.....	0.4
30kg.....	108TAUN-30kg-A1.....	0.4
50kg.....	108TAUN-50kg-A1.....	0.4
75kg.....	108TAUN-75kg-A1.....	0.4
100kg.....	108TAUN-100kg-A1.....	0.4
150kg.....	108TAUN-150kg-A1.....	0.4
200kg.....	108TAUN-200kg-A1.....	0.4

Imperial thread, 1:5000 accuracy

Rated Capacity	Part No.	Weight Approx. (kg)
5kg.....	108TAUN-5kg-A2.....	0.4
7kg.....	108TAUN-7kg-A2.....	0.4
10kg.....	108TAUN-10kg-A2.....	0.4
15kg.....	108TAUN-15kg-A2.....	0.4
20kg.....	108TAUN-20kg-A2.....	0.4
30kg.....	108TAUN-30kg-A2.....	0.4
50kg.....	108TAUN-50kg-A2.....	0.4
75kg.....	108TAUN-75kg-A2.....	0.4
100kg.....	108TAUN-100kg-A2.....	0.4
150kg.....	108TAUN-150kg-A2.....	0.4
200kg.....	108TAUN-200kg-A2.....	0.4

INTERCHANGEABLE PRODUCTS

Brand	Model
108TAUN	
Cardinal.....	TSP
Coti Global.....	CG-42
HBM.....	SP4
Rice Lake.....	RL1042
Rice Lake.....	RLSP4
Rice Lake.....	RL42018A
Vishay Revere Transducers.....	642
Vishay Tedeo-Huntleigh.....	1042(imperial threads)

Product Datasheet Disclaimer

Information Changes:

All product specifications, statements, information, and data (collectively, the "Information") in this catalog or made available elsewhere by ANYLOAD are subject to change. Customers must verify the applicability of the Information at the time of order placement.

Accuracy and Reliability:

While all Information is believed to be accurate and reliable, it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Laboratory Conditions:

Data listed in the datasheet is produced within controlled laboratory settings and may not be reproducible without exact replication of all metrological conditions. Users must validate that a product with the described properties is suitable for their applications.

Interchangeability:

Statements of interchangeability with other manufacturers are based on ANYLOAD's knowledge at the time of publication and are not intended to constitute any warranty concerning the substitutability of an ANYLOAD product with one made by another Manufacturer.

Warranty Voidance:

Any use of the product outside of specifications or any storage or installation inconsistent with product guidance voids any warranty.

Intended Use:

The information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. ANYLOAD provides technical advice without obligation or liability for the advice given or results obtained.

Component Failures:

Although ANYLOAD designs and manufactures its products to stringent quality and safety standards, isolated component failures may still occur. Applications requiring high reliability or safety should employ suitable designs or safeguards to ensure that component failure does not result in personal injury or property damage.

High-Risk Applications:


Unless specifically agreed to in writing, ANYLOAD has not tested or certified its products, services, or deliverables for use in high-risk applications (e.g., medical life support, nuclear facilities, weapon systems). ANYLOAD makes no assurances that the products are suitable for high-risk uses. Under no circumstances does ANYLOAD warrant or guarantee suitability for any customer design or manufacturing process.

Contact authorized ANYLOAD personnel for special terms and conditions regarding products designed for specific safety requirements.

Safety Measures:

All product-related warnings, cautions, and notes must be observed. Customers should not assume that all safety measures are indicated or that other measures may not be required.

California Proposition 65:

 **WARNING:** Some products manufactured or distributed by ANYLOAD may contain trace amounts of chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. These substances are present in minimal quantities and are typically encapsulated within our products. This warning is provided to enable you to make informed decisions as a consumer.