

3590EGT-IECEX3GD

3590EGT-IECEX3GD "TOUCH" : TOUCH SCREEN
INDICATOR FOR Ex 2 & 22 ZONES



Weight indicator with a big touch screen display,
for ATEX 2 & 22 hazardous zones.

ATEX/IECEX marking:

II 3G Ex nR IIC T6 Gc X (0°C ≤ Ta ≤ 50°C) for
gases

II 3D Ex tc IIIC T85°C Dc IP65 X (0°C ≤ Ta ≤ 50°C)
for dust.

ATEX/IECEX marking with intrinsically safe
connection for load cells:

II 3(1)G Ex nR [ia] IIC T6 Gc X (0°C ≤ Ta ≤ 50°C)
for gases.

II 3(1)D Ex tc [ia] IIIC T85°C Dc IP65 X (0°C ≤ Ta
≤ 50°C) for dust.

Suitable for advanced industrial applications, it's
fitted with 3 serial ports, configurable printouts
and integrated alibi memory.

CE-M approvable (OIML R-76 / EN 45501, OIML
R-51 - OIML R-61 - MID for dynamic check
weigher AWI). Ethernet interface available as
option.

Working in cooperation with:

ASSOCIATED SCALE SERVICES PTY LTD

47 MORETON STREET - 4110 - HEATHWOOD - AUSTRALIA
Tel. +617 3277 0077 Fax. +617 3272 0363
sales@associatedscales.com.au

**The best solution
for advanced industrial
applications**



WHAT'S NEW

- IECEx certification.
- New enclosure with screwless front closure for easy cleaning of the indicator.
- PG7 and PG9 cable glands with adapters for 4 to 7 mm and 7 to 10 mm cable routing. Equipped with anti-friction system that does not require additional external cable fixing, as required by the IECEx scheme and ATEX directives.
- Available in specific version for direct connection to load cells installed in zone 1/21 and 0/20.

TECHNICAL FEATURES

- 5,7" colour touch screen display.
- Multilanguage software.
- 15-key alphanumerical waterproof keyboard.
- 3-way control light.
- Selectable QWERTY, AZERTY or QWERTZ keyboard integrated in the touch screen.
- AISI 304 stainless steel casing, with IP65 certified protection and IP68 performance.
- Dimensions: 280x143x185mm.
- Suitable for use on the table.
- Real time clock and permanent data storage.
- Alibi memory as standard, integrated on the motherboard.
- Slot for built-in micro SD to record the configuration, logos, and customized screens (upon request).
- Functions available with DINITOOLS utility
 - Configuration, data entry and print formatting.
 - Recording and filing of all the information on PC.
 - Complete retrieval of the configuration.
 - Instrument calibration with numeric values.
 - Customization of the screens.
- 24-bit A/D converter, 4 channels, up to 3200 conv./sec. with automatic frequency selection and up to 8 signal linearisation points.
- 4 independent analogue channels for weight reading (up to 2 in E-AF03 version).
- Connection with up to 16 analogue load cells of 350 Ohm (45 load cells of 1000 Ohm).
- Up to 10.000e OIML or multi-range 3 x 3000e @ 0,3 μ V/d CE-M legal for trade.
- Up to 1.000.000 displayable divisions for internal factory use, with internal resolution up to 3.000.000 points.
- Connectable to printers and labellers with free programming of the printout formats.
- Power supply from 110-240Vac line or 12-24 Vdc Max. 25.2W

COMPLETE PROGRAMMABILITY FOR CUSTOMISED APPLICATIONS

- Thanks to the integrated development area, fully customised applications can be created independently:
 - Specific weighing softwares according to customer requirements
 - Tailor-made weighing softwares to replace terminals in existing installations
 - Wizards, messaging for the operator
 - Serial port management, protocol customization
 - Complete digital I/O management
 - Sequential or simultaneous automations
 - Data entry, tailor-made archives

Dini Argeo also offers the service of software development (to be quoted).

STANDARD APPLICATIONS

- SUPPLIED AS STANDARD:

- AF01: Totalization and formula weighing

OPTIONAL:

- AF02: Piece/quantity counting
- AF03: Weighbridges - Vehicle In/Out
- AF04: Statistical check of prepackaged goods
- AF05: Price computing and industrial labelling
- AF08: Static wheel and axle weighing with 2 or more pads
- AF09: Software for dynamic or static axle weighing with 1 or 2 pads
- BATCH1: Single product dosage systems in loading and unloading
- BATCH: Software for multicomponent dosage systems in loading and unloading (requires IOEXPB expansion board)
- BATCH-R61: Single product dosage systems in loading and unloading

I/O SECTION


- 2 RS232 serial ports on terminals, for connection to printer, PC, radio module and optional interfaces.
- 1 RS485/RS232 serial port on terminals, for connection to weight repeater, remote scale, badge readers or digital load cells.
- 4 serial optoisolated outputs, up to 16 with optional board.
- 2 serial optoisolated inputs, up to 8 with optional board.
- Modbus RTU Interface.
- Analog output DAC16O requires IOEXPB expansion board.

Optionals:

- Profibus or Modbus/TCP interface to install in safety zone.
- Profinet, Ethernet/IP, EtherCAT, CANopen, or external DeviceNet fieldbus (optional, only with weighing programs AF01, AF02, AF03, AF08, AF09, Batch1).
- Wireless Personal Area Network (WPAN), for fast wireless programming of archives, via PC, tablet or smartphone.

CUSTOMIZABLE DISPLAYS

- Thanks to the programmable Touch Screen display, it is possible to create the interface tailored to each application:

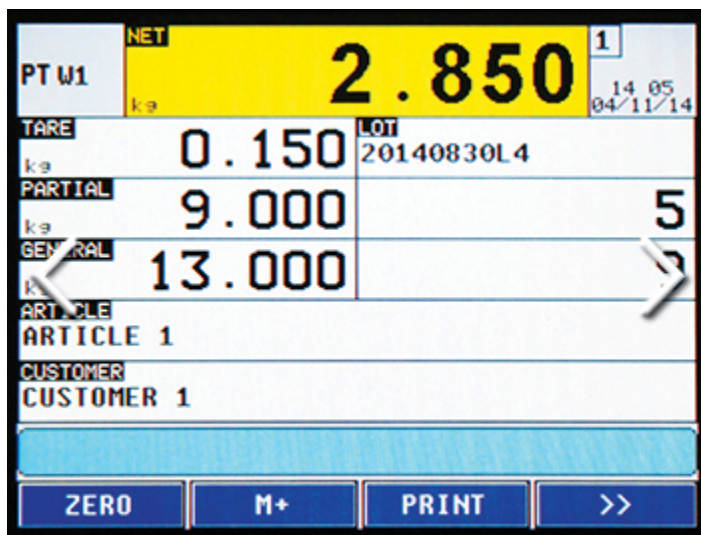

- The PC software "Dini Display Tool" allows for the quick customisation of the TOUCH display.



MAIN CERTIFICATIONS

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134 (AF09)
- EN/IEC 60079-0
- EN/IEC 60079-11 (ZB version)
- EN/IEC 60079-15
- EN/IEC 60079-31
- Australian legal for trade certificate of approval (NMI S788)
- Certification according to ATEX directive 2014/34/EU and in compliance with IECEx scheme, group II category 3GD according to EN/IEC 60079-0, EN/IEC 60079-11, EN/IEC 60079-15, EN/IEC 60079-31.



[View the certificate](#)

AVAILABLE LANGUAGES

- Menu selectable languages:
IT, EN, FR, DE, ES, PT, PL*

* Polish available only on EGT-AF01, EGT-AF02, EGT-AF03, EGT-AF04, EGT-AF09, EGT-BATCH, EGT-BATCH1

Code pages available for the translation of messages and screens, using the Custom Language Tool program (downloadable in the Download section):

- Windows 1252: EN, GA, IT, NO, PT, ES, SV, DE, FI, IS, FR, NL, SL
- Windows 1250: PL, CS, SK, HU, SL, SH, RO, SQ, EN, DE
- Windows 1251: RU, UK, BE, BG, SR, MK, EN
- Windows 1253: EL, EN
- Windows 1258: VI, EN, FR


AVAILABLE ON ESTIMATE

- Power supply 24 Vdc.
- PG13,5 anti-friction cable glands with adapters for the passage of cables from 5,5 to 8 mm and from 10,5 to 13 mm.


DETAIL 1



DETAIL 2

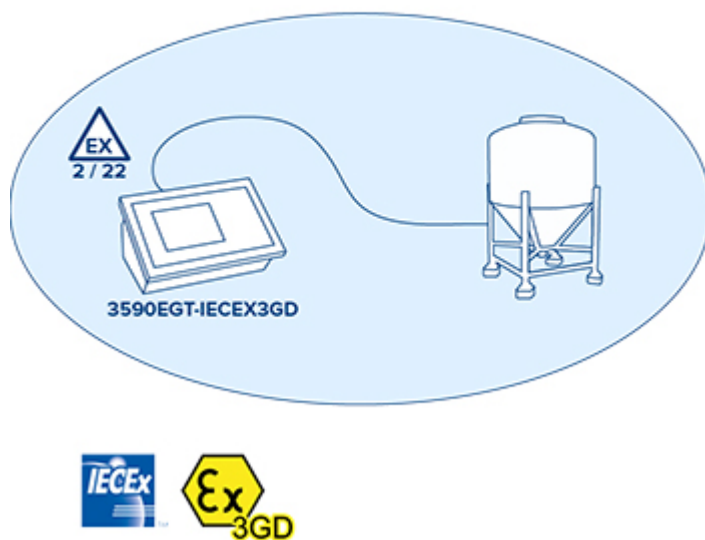

DETAIL 3

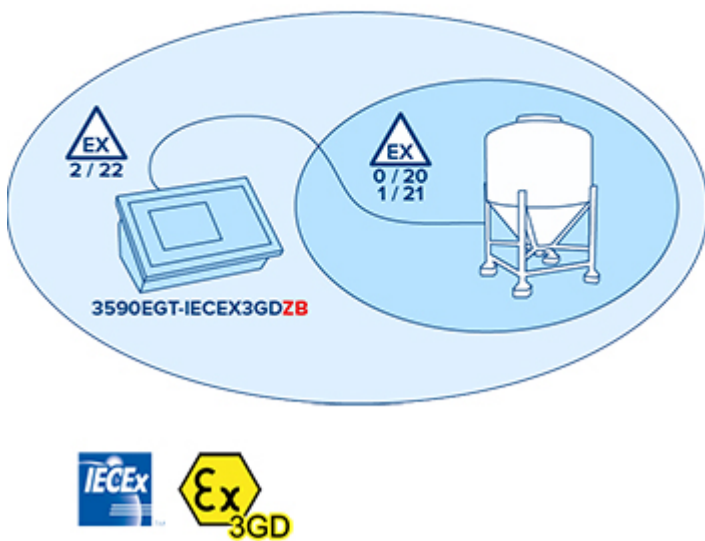



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

ASSOCIATED SCALE SERVICES PTY LTD

47 MORETON STREET - 4110 - HEATHWOOD - AUSTRALIA

Tel. +617 3277 0077 Fax. +617 3272 0363

sales@associatedscales.com.au

SALES AND TECHNICAL ASSISTANCE SERVICE